

Kitette

User Manual

service@kitette.com



* SAVE THESE INSTRUCTIONS /FOR HOUSEHOLD USE ONLY

IMPORTANT SAFETY INFORMATION

1. Please make sure the specified line voltage is the same as your power grid.
2. Please do not operate the device if there is any damage to the power cord, power plug or the device. Please contact seller.
3. DO NOT place the dehumidifier near curtains or similar items that can be easily sucked.
4. Please do not use the dehumidifier in an easily flammable or explosive environment. The ambient temperature should not exceed 40°C. The dehumidifier works best at a room temperature of 15–40°C.
5. Please unplug the power cord from the wall outlet if you don't use the device for a long time.

SAFETY INSTRUCTIONS

6. Do not bend or pull power cord to avoid bad contact.
7. Please only use the device on flat, stable surfaces. And do not tilt the device.
8. DO NOT cover the dehumidifier. To avoid overheating due to poor ventilation.
9. Do not pull out the power plug when your hand is wet.
10. When the machine is running, don't use tools such as thin stick to clean the machine to avoid malfunction.
11. It is not a toy, please keep away from children.
12. DO NOT clean with gasoline, alcohol and the organic detergent.
13. DO NOT use the dehumidifier in low temperature, dusty or volatile acid, alkali and oil environment.
14. It is forbidden to exchange the non-matching adapter without authorization.
15. It is forbidden to disassemble and modify the adapter and all parts of the machine without permission

WARRANTY INFORMATION

- We appreciate your feedback and offer you the best service.
- Should return the product within 1 year of purchase have defects, we will grant you one refund or send you a new one. You're welcome email us your order number or contact us the seller on Amazon. Your requests will be like this processed as soon as possible.

Important: For the following situations, our company refuses any liability from:

1. For orders not placed by an authorized Amazon store or an official website.
2. For damage caused by misuse of Buyers arise, and normal wear and tear of the machine.

EXTEND YOUR WARRANTY BY 1 YEAR

Register your product at **www.kitette.com** to extend your 1-year warranty by an additional year. Please fill out all required fields and include your order ID, place of purchase, and purchase date, if applicable.

GETTING TO KNOW YOUR DEHUMIDIFIER

- ① Button

② Remote control

③ Air outlet


④ Handle
- ⑤ Air inlet

⑥ Bucket cover

⑦ Bucket

⑧ Visual window
- ⑨ Water plug (of bucket)

⑩ Rubber hose

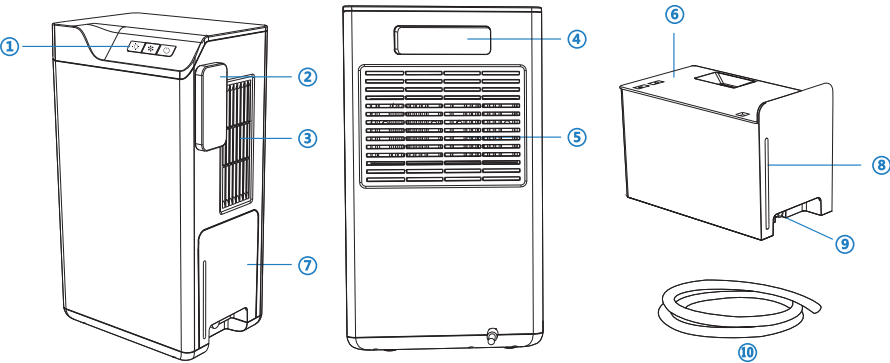

SPECIFICATION


Model: DryBox 2000	
Size:7.85*5.5*13.89inches (19.92*14*35.3cm)	Weight:5.5lb (2.5kg)
Power supply:AC 100~240V, 50~60Hz	Dehumidification capacity:600mL/Day (30°C, 80%RH)
Power:40W	Bucket capacity:2000mL
Working environment:50°F (10°C) - 122°F (50°C) , 39dB (in high-speed mode)	Noise level:35dB (in low-speed mode), 39dB (in high-speed mode)
Suggested area:≤540sq.ft(50 m ²)	Remote control distance: < 393 inches (10m)

PACKAGE CONTENT	1 X Dehumidifier	1 X Rubber Hose
	1 X Remote Control	1 X User Manual

CONTROL PANEL

	Power Button The power-on default is low-speed mode.
	Wind Speed control Two wind speeds are adjustable and can be switched between high speed and low speed.
	Light control Adjustment of indicator light on and off.

REMOTE CONTROL OPERATION PANEL

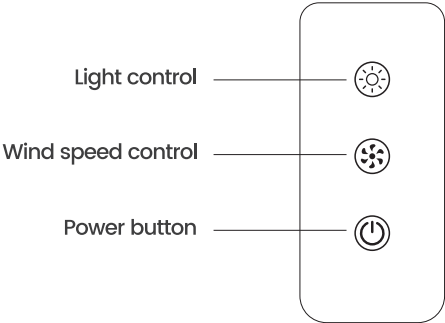


*CR2025 button battery included

The buttons on the remote control are used in the same way as the buttons on the panel.

OPERATION


Do not cover the air outlet and air inlet, otherwise it will affect the dehumidification efficiency

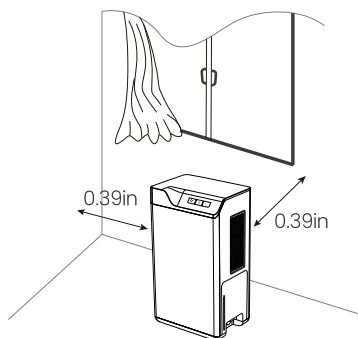

REMOVING THE COLLECTED WATER

1 / Use the bucket

When the bucket is full, remove the bucket and empty it.

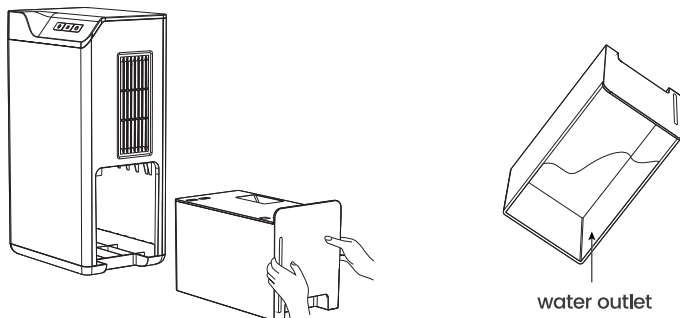


NOTE

- When the bucket is full, the light will turn red and the dehumidifier will stop.
- When the bucket is not placed correctly, the red light flashes.
- When you don't need to use the dehumidifier, keep the water tank dry and cut off the power link.

2 / Continuous draining

Before starting the machine, pull out the water plug of the bucket, connect the hose, and drain the water directly through the hose without taking out the bucket.

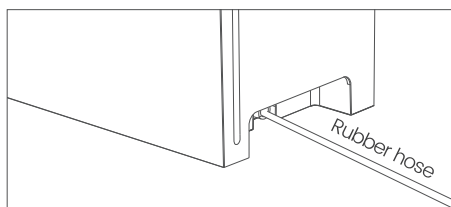

NOTE

- Make sure the connection is tight and there is no leaking.
- The drainage facilities should be lower than the drain of the dehumidifier, and be sure to run the water hose sloping downward.
- When not using continuous drainage, insert a water plug to prevent water leakage.
- Do not use a continuous drain when the temperature is at or below 32°F (0°C) or it will freeze and block the water pipes.

CARE & MAINTENANCE

WARNING: Turn the dehumidifier off and remove the plug from the wall outlet before cleaning.

Clean the dehumidifier with water and mild detergent.

Do not use bleach or abrasives.

1 / Clean the Grille and Case

- Do not splash water directly onto the main unit. Doing so may cause an electrical shock, cause the insulation to deteriorate, or cause the unit to rust.
- The air intake and outlet grilles get soiled easily. Use a vacuum attachment or brush to clean.

2 / Clean the bucket

Clean the bucket with water and mild detergent every two weeks.

3 / Storing the dehumidifier

- After turning off the dehumidifier, wait a day until the inside of the dehumidifier and the water tank are dry.
- Store the dehumidifier upright in a dust-proof, dry, well-ventilated place.
- After turning off the dehumidifier, wait one day until all water in the internal of the dehumidifier flows into the bucket, and then empty the bucket.
- Clean the main dehumidifier, bucket.
- Wrap the cord and bundle it with the band.

TROUBLESHOOTING

Red light keeps flashing	Make sure the plug is fully inserted into the socket
	Check whether the power cord is damaged
	Check House Fuses/Breakers
	The water tank is full or placed incorrectly
The dehumidification effect is not obvious	Make sure there is enough dehumidification time
	Please keep all air intakes uncovered
	Use a dehumidifier in a small area and keep windows and doors closed
	Room temperature is too low, below 50°F (10°C)
Loud noise during operation	Make sure the dehumidifier is operating on level ground and upright
	There may be foreign objects inside the dehumidifier
red light keeps flashing	bucket full
	The water tank is placed incorrectly
water on the floor	The ground on which the device is placed is uneven
	loose drain
	The water plug is not in the barrel

Kitette



/kitette.com



service@kitette.com

EC

REP

EUBRIDGE ADVISORY GMBH

Virginia Str. 2 35510 Butzbach, Germany
eubridge@outlook.com

UK

REP

TANMET INT'L BUSINESS LTD

9 Pantygraigwen Road, Pontypridd, Mid Glamorgan, CF37 2RR, UK
tanmetbiz@outlook.com



Manufacture: Guangdong Invitop Technology Co., Ltd.

Address: 2F-201& 3F, Area A1, Minsen Information Technology Industrial Park, No.8, East of Jinsan Avenue, Sanjiao Town, Zhongshan, Guangdong.